

# QBF-1950-2050-40

1.95~2.05GHz, 40dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	1.95~2.05GHz
Passband Ripple:	2dB max.
Insertion Loss:	3.5dB max.
Stopband Attenuation:	40dB@1.9GHz min. 40dB@2.1GHz min.
VSWR:	1.5 max.
Power:	2W

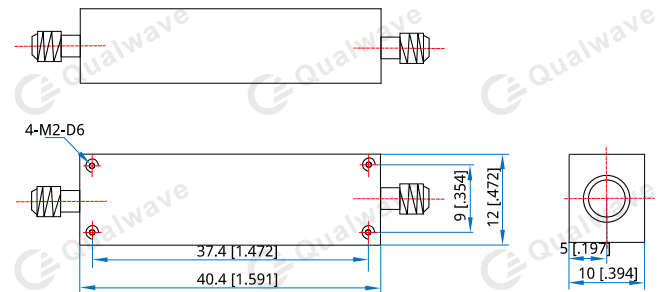
**Mechanical**

Size*1:	40.40*12*10mm 1.591*0.472*0.394in
RF Connectors:	SMA female
Mounting:	4-M2, depth 6mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-1950-2050-40**

Customization is available upon request.