

QBF-1980-2010-80

1.98~2.01GHz, 80dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|--------------------------|---|
| Frequency: | 1.98~2.01GHz |
| Passband Width: | 30MHz |
| Passband Insertion Loss: | 1.5dB max. |
| Stopband Attenuation: | 80dB@DC~1.82GHz min. 80dB@2.17~2.2GHz min. |
| VSWR: | 1.5 max. |
| Average Power: | 60W |

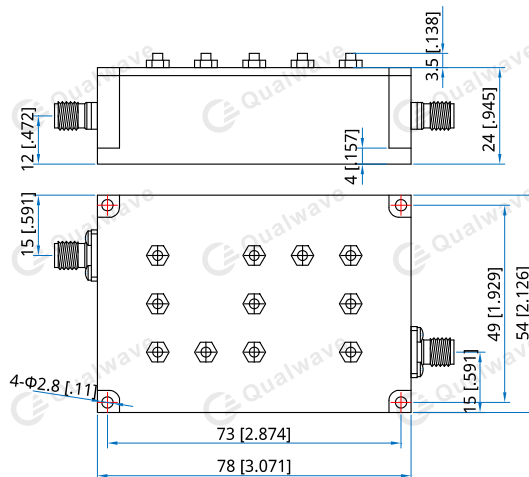
Mechanical

| | |
|----------------------|-----------------------------------|
| Size ^{*1} : | 78*54*24mm 3.071*2.126*0.945in |
| RF Connectors: | SMA Female |
| Mounting: | 4-Φ2.8mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | -40~+70°C |
| Non-operating Temperature: | -55~+85°C |

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-1980-2010-80

Customization is available upon request.