

## QBF-2025-2085-40

2025~2085MHz, 40dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	2025~2085MHz
Insertion Loss:	1dB max.
VSWR:	1.3 max.
Stopband Attenuation:	40dBc@2200~2300MHz min.


### Mechanical

RF Connectors:	SMA Female
Mounting:	4- $\Phi$ 2.8mm through-hole

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

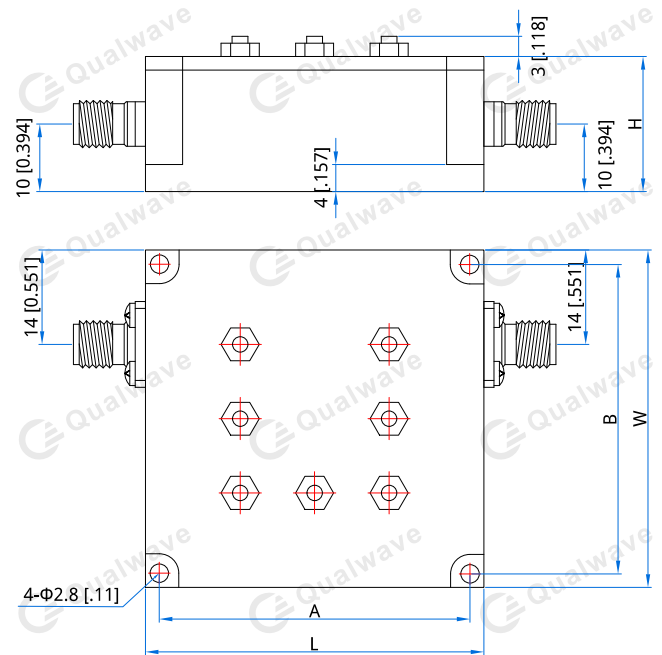

Size	L	W	H	A	B
mm	50	50	20	45	45
in	1.969	1.969	0.787	1.772	1.772

Unit: mm [in]

Tolerance:  $\pm 0.2$ mm [ $\pm 0.008$ in]

### How To Order

[QBF-2025-2085-40](#)

Customization is available upon request.