

QBF-2037.5-2272.5-50

2.0375~2.2725GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.0375~2.2725GHz
Passband Insertion Loss:	2dB max.
Passband Ripple:	1.2dB max.
VSWR:	1.16 max.
Stopband Attenuation:	80dB @DC ~ 1.96GHz, 2.35 ~ 5.0GHz min. 50dB @1.96~2GHz, 2.31 ~ 2.35GHz min.
Impedance:	50Ω
Average Power:	5W max.

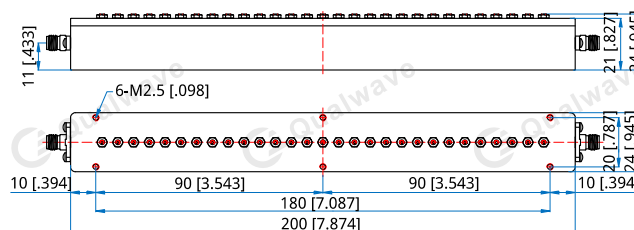
Mechanical

Size ^{*1} :	200*24*24mm 7.874*0.945*0.945in
Connectors:	SMA Female
Mounting:	6-M2.5mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-2037.5-2272.5-50

Customization is available upon request.