

# QBF-20600-25000-60

20.6~25GHz, 60dBc

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	20.6~25GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.8 max.
Stopband Attenuation:	60dBc@18.8GHz min. 60dBc@26.8GHz min.

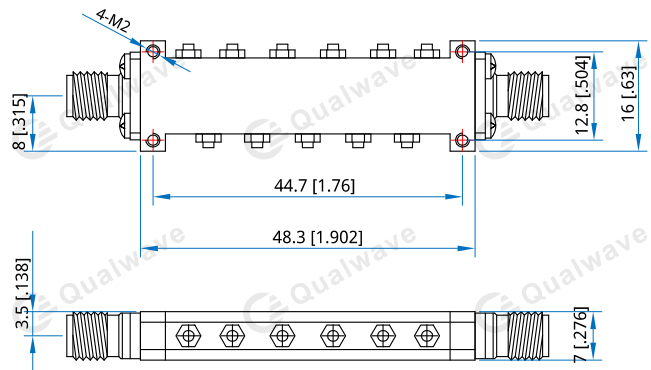
**Mechanical**

Size <sup>*1</sup> :	48.3*16*7mm 1.902*0.63*0.276in
RF Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-20600-25000-60**

Customization is available upon request.