

QBF-21500-22500-70

21.5~22.5GHz, 70dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	21.5~22.5GHz
3dB Bandwidth:	1.25GHz max.
1dB Passband Bandwidth:	1GHz
Passband Insertion Loss:	2dB max.
Passband Ripple:	1dB max.
VSWR:	1.3 max.
Stopband Attenuation:	70dB@DC~20.9GHz min.
	70dB@23.1~40GHz min.
Impedance:	50Ω
Average Power:	5W max.

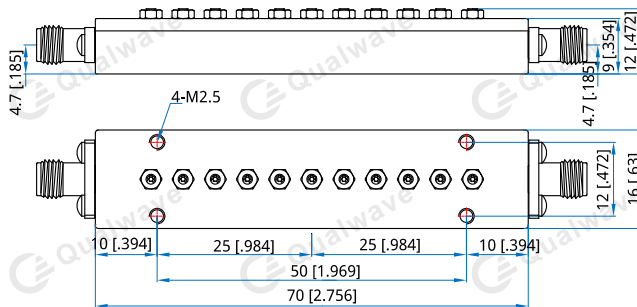
Mechanical

Size ^{*1} :	70*16*9mm
	2.756*0.63*0.354in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-21500-22500-70

Customization is available upon request.