

# QBF-2200-2400-60

2.2~2.4GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Frequency:	2.2~2.4GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
Stopband Attenuation:	60dB@DC~2.1GHz min. 60dB@2.5~6GHz min.
VSWR:	1.22 max.
Impedance:	50Ω
Average Power:	20W max.

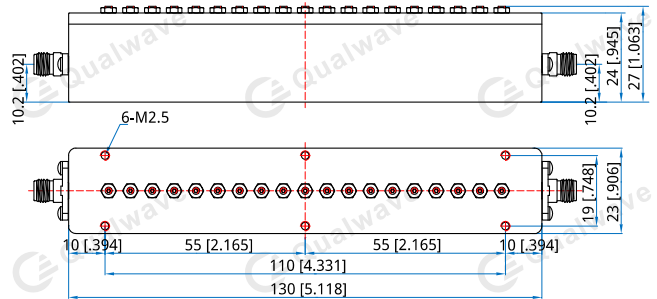
**Mechanical**

Size <sup>*1</sup> :	130*23*27mm 5.118*0.906*1.063in
RF Connectors:	SMA female
Mounting:	6-M2.5 through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-2200-2400-60**

Customization is available upon request.