

QBF-23000-30000-85

23GHz~30GHz, 85dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation



Electrical

Passband:	23~30GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	85dBc@19GHz min. 85dBc@34GHz min.


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4* Φ 2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

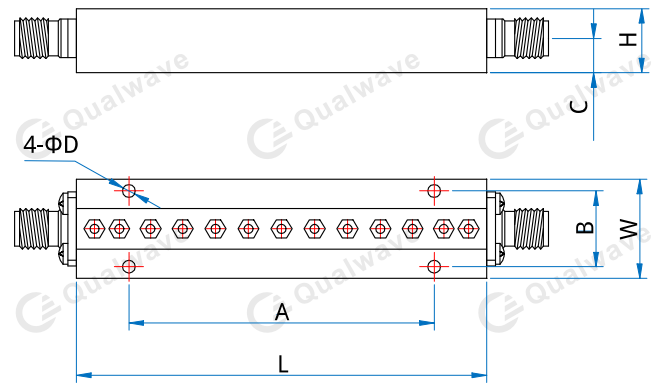

Size	L	W	H	A	B	C	D
mm	50	17	10	31	13	5.1	2.2
in	1.969	0.669	0.394	1.220	0.512	0.201	0.087

Unit: mm [in]

Tolerance: \pm 0.2mm [\pm 0.008in]

How To Order

[QBF-23000-30000-85](#)

Customization is available upon request.