

QBF-2400-2500-50

2.4~2.5GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.4~2.5GHz
Passband Insertion Loss:	1dB max.
VSWR:	1.3 max.
Stopband Attenuation:	50dB@DC~2.05GHz min. 50dB@2.85~5GHz min.
Impedance:	50Ω
Average Power:	5W max.

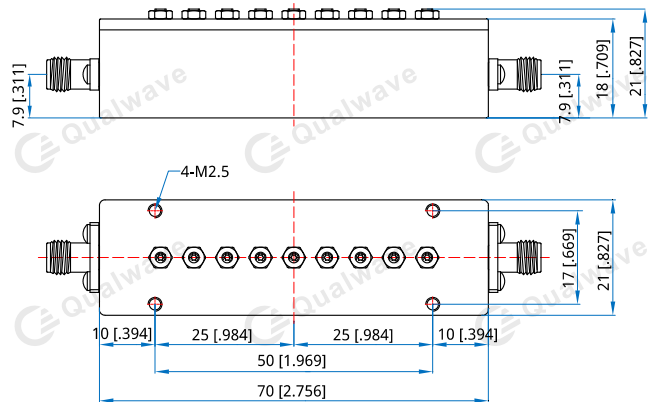
Mechanical

Size ^{*1} :	70*21*21mm 2.756*0.827*0.827in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-2400-2500-50

Customization is available upon request.