

QBF-24000-27800-60

24GHz~27.8GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	24~27.8GHz
Passband Insertion Loss:	2dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	60dBc@DC~22.4GHz min. 60dBc@30~40GHz min.
Average Power:	0.5W min.


Mechanical

RF Connectors:	2.92mm Female, removable Φ0.38mm inner pin
Mounting:	4*Φ2.2mm through-hole

Environmental

Operating Temperature:	0~+55°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

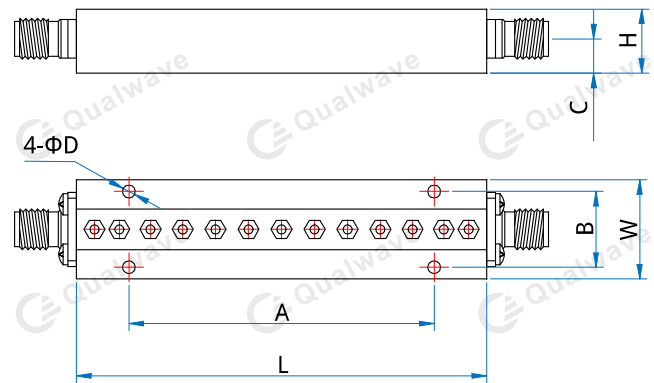

Size	L	W	H	A	B	C	D
mm	67.1	17	11	47.1	13	6	2.2
in	2.642	0.669	0.433	1.854	0.512	0.236	0.087

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

[QBF-24000-27800-60](#)

Customization is available upon request.