

# QBF-2526.5-2579.5-40

2.5265~2.5795GHz, 40dB

Features:  
 \* High Stopband Rejection  
 \* Small Size

Applications:  
 \* Telecom  
 \* Laboratory Test  
 \* Receivers  
 \* Instrumentation

## Electrical

Passband:	2.5265~2.5795GHz
Passband Insertion Loss:	1.0dB max.
Passband Ripple:	±0.4dB max.
VSWR:	1.5 max.
Stopband Rejection:	40dB@2.3GHz min. 40dB@2.7GHz min.
Input Power:	10W max.
Impedance:	50Ω

## Mechanical


Size*1:	66.1*48.3*17.8mm 2.60*1.90*0.70in
Connectors:	SMA Female
Mounting:	4*2-56 UNC 2B

[1] Exclude connectors.

## Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

## Outline Drawings

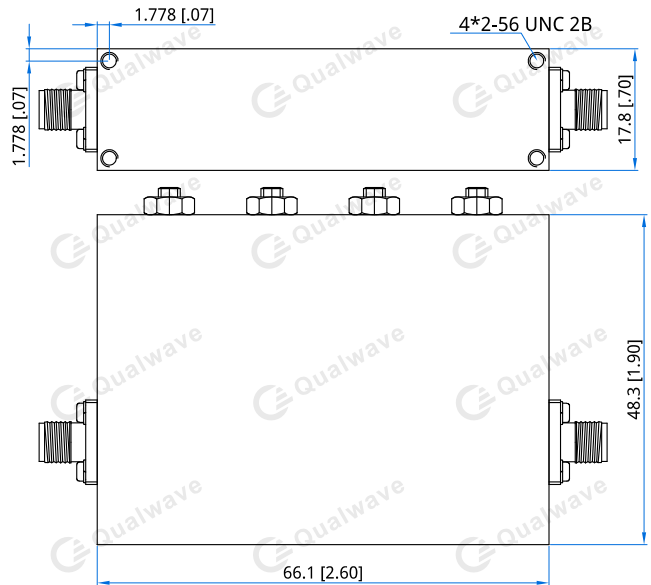

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

## How To Order

**QBF-2526.5-2579.5-40**

Customization is available upon request.