

# QBF-26400-33000-60

## 26.4~33GHz, 60dB

<b>Features:</b> * High Stopband Rejection * Small Size	<b>Applications:</b> * Telecom * Laboratory Test * Receivers * Instrumentation
---	--

### Electrical

Passband:	26.4~33GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.8 max.
Stopband Attenuation:	60dB@DC~24GHz min. 60dB@37~40GHz min.
Average Power:	30W max.

### Mechanical


Size*1:	59.5*16*11mm 2.343*0.63*0.433in
Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

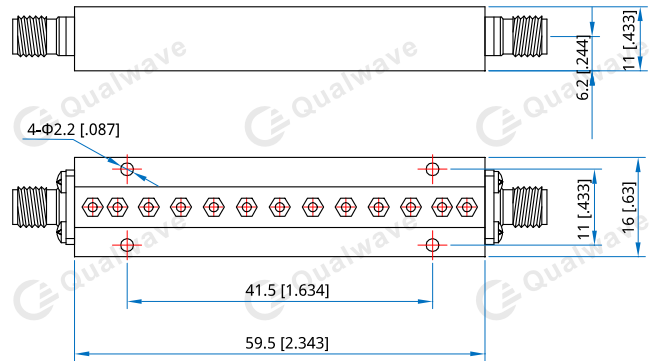

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

### How To Order

**QBF-26400-33000-60**

Customization is available upon request.