

QBF-2900-3600-50

2.9~3.6GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	2.9~3.6GHz
Center Frequency:	3250MHz
Passband Insertion Loss:	1.0dB max.
Passband Ripple:	0.45dB max.
Stopband Attenuation:	50dB min.@DC~2570MHz 50dB min.@3850~7000MHz
VSWR:	1.22 max.
Average Power:	5W max.
Impedance:	50Ω

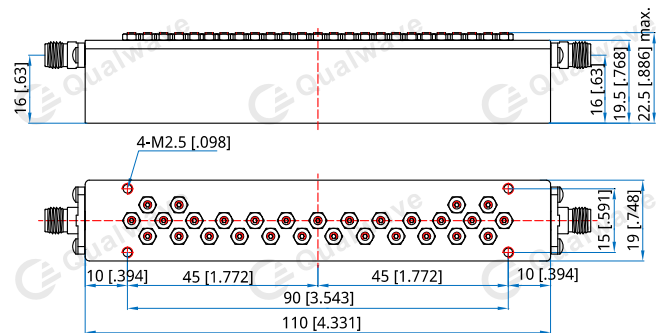
Mechanical

Size ^{*1} :	110*19*19.5mm 4.331*0.748*0.768in
RF Connectors:	SMA female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-2900-3600-50

Customization is available upon request.