

QBF-3000-4300-50

3~4.3GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	3~4.3GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	50dB@DC~2.5GHz min. 50dB@5~7GHz min.
Impedance:	50Ω
Average Power:	2W max.

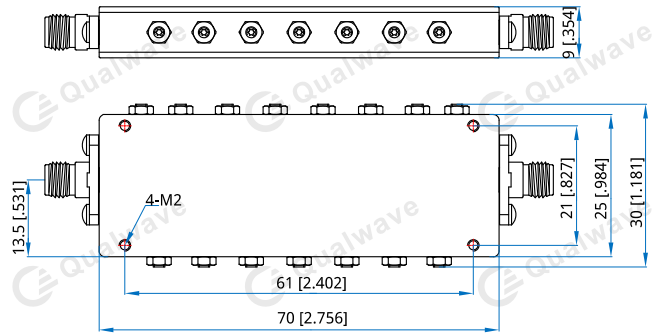
Mechanical

Size ^{*1} :	70*30*9mm 2.756*1.181*0.354in
Connectors:	SMA Female
Mounting:	4-M2 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-3000-4300-50

Customization is available upon request.