

QBF-310-443-50

0.31~0.443GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	0.31~0.443GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
Stopband Attenuation:	50dB@DC~176.5MHz min. 50dB@576.5~1500MHz min.
VSWR:	1.5 max.
Impedance:	50Ω
Average Power:	50W max.

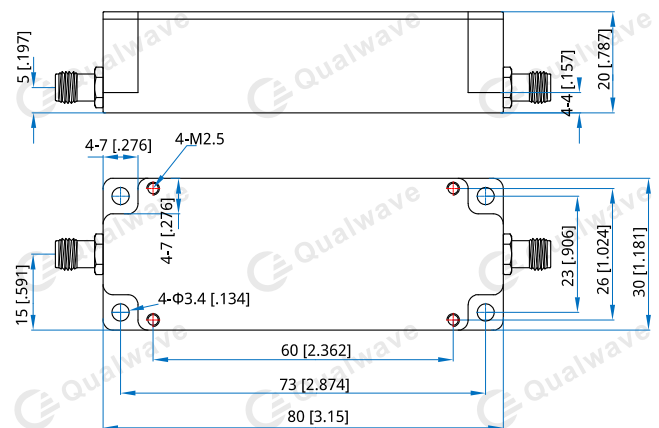
Mechanical

Size ^{*1} :	80*30*20mm 3.15*1.181*0.787in
Weight:	65g
RF Connectors:	SMA female
Mounting:	4-M2.5 through-hole 4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-310-443-50

Customization is available upon request.