

QBF-32500-33500-60

32.5~33.5GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	32.5~33.5GHz
Passband Insertion Loss:	1dB max.
VSWR:	1.6 max.
Stopband Attenuation:	60dB@31.5GHz min. 60dB@34.5GHz min.
Average Power:	50W


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4- Φ 2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

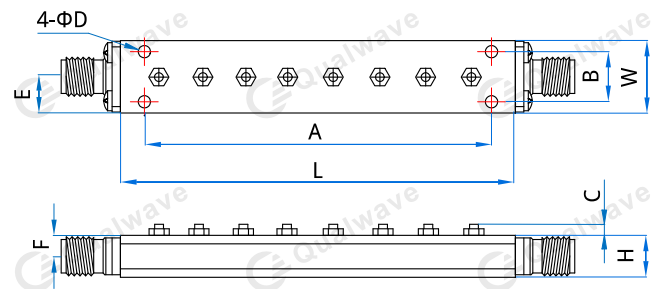

Size	L	W	H	A	B	C	D	E	F
mm	56	16	9	40	12	2	2.2	8	5
in	2.205	0.63	0.354	1.575	0.472	0.079	0.087	0.315	0.197

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QBF-32500-33500-60

Customization is available upon request.