

QBF-32600-36360-50

32.6~36.36GHz, 50dB

- | | |
|---------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---------------------------------------------------------------|--------------------------------------------------------------------------------------------|

Electrical

Passband:	32.6~36.36GHz
Passband Insertion Loss:	1.2dB max.
Passband Ripple:	0.6dB max.
VSWR:	1.25 max.
Stopband Attenuation:	80dB @ DC ~ 30.78GHz, 38.18 ~ 47GHz min. 50dB @ 47 ~ 50GHz min.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	60*16*12mm 2.362*0.63*0.472in
Connectors:	2.92mm Female
Mounting:	4-M2.5mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

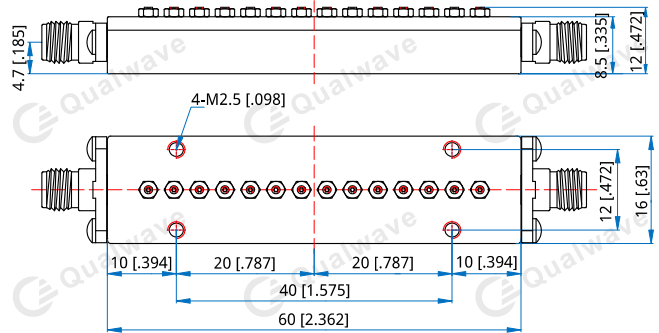

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-32600-36360-50

Customization is available upon request.