

QBF-33500-36500-50

33.5~36.5GHz, 50dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	33.5~36.5GHz
Insertion Loss:	3dB max.
Stopband Attenuation:	50dBc@DC~30.5GHz min. 50dBc@39.5~50GHz min.
VSWR:	2 max.

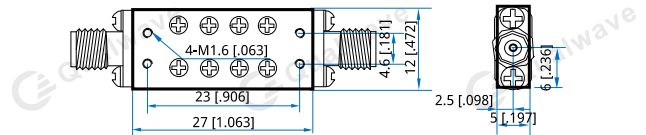
Mechanical

Size ^{*1} :	27*12*5mm 1.063*0.472*0.197in
RF Connectors:	2.92mm Female (removable)
Mounting:	4-M1.6 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-34000-36000-50

Customization is available upon request.