

# QBF-3400-3600-30

3.4~3.6GHz, 30dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	3.4~3.6GHz
Passband Insertion Loss:	1.5dB max.
Passband Ripple:	0.7dB max.
VSWR:	1.25 max.
Stopband Attenuation:	30dB@DC~3.35GHz min.
	30dB@3.65~8GHz min.
Impedance:	50Ω
Average Power:	100W max.

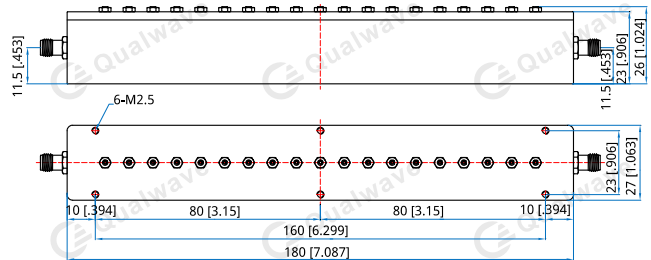
**Mechanical**

Size <sup>*1</sup> :	180*27*26mm
	7.087*1.063*1.024in
Connectors:	SMA Female
Mounting:	6-M2.5 through hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-3400-3600-30**

Customization is available upon request.