

QBF-400-700-50

0.4~0.7GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	0.4~0.7GHz
Passband Insertion Loss:	2.5dB max.
Passband Ripple:	1.5dB max.
Stopband Attenuation:	50dB@DC~0.3GHz min. 50dB@0.85~1GHz min.
VSWR:	1.5 max.
Average Power:	1W max.
Impedance:	50Ω

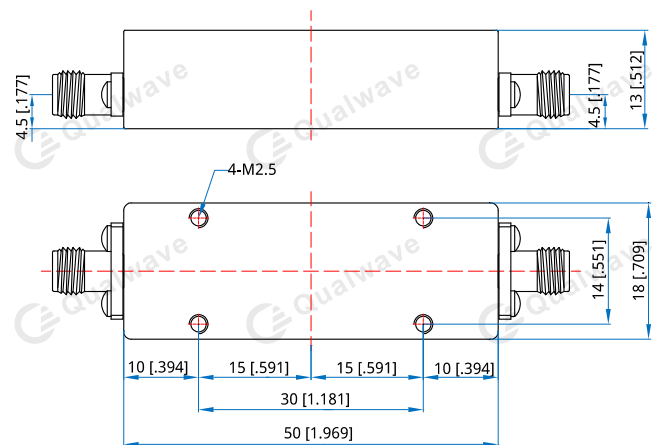
Mechanical

Size ^{*1} :	50*18*13mm 1.969*0.709*0.512in
RF Connectors:	2.92mm female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-400-700-50

Customization is available upon request.