

QBF-4300-8200-50

4.3~8.2GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	4.3~8.2GHz
Passband Insertion Loss:	1.5dB max.
Passband Ripple:	0.7dB max.
Stopband Attenuation:	50dB@DC~3.7GHz min. 50dB@8.8~10GHz min.
VSWR:	1.7 max.
Average Power:	2W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	81*25*10mm 3.189*0.984*0.394in
RF Connectors:	SMA-Female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

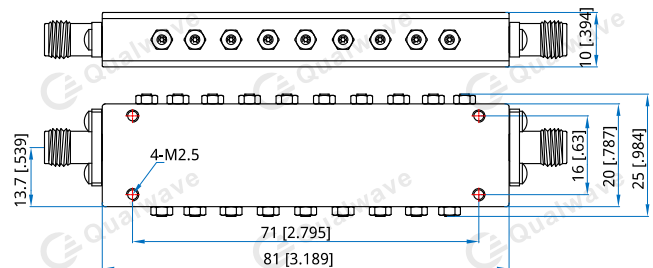

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-4300-8200-50

Customization is available upon request.