

QBF-4960-4980-70

4.96~4.98GHz, 70dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	4.96~4.98GHz
Passband Insertion Loss:	0.8dB max.
Passband Ripple:	0.2dB max.
VSWR:	1.25 max.
Stopband Attenuation:	70dB @ DC ~ 4270MHz min. 50dB @ 4270 ~ 4570MHz min. 50dB @ 5370 ~ 5670MHz min. 70dB @ 5670 ~ 14000MHz min.
Impedance:	50Ω
Average Power:	5W max.

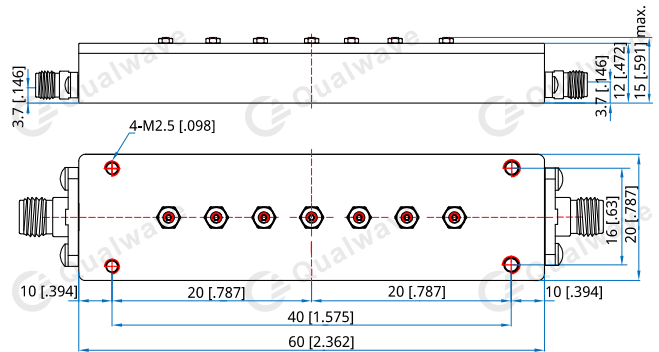
Mechanical

Size ^{*1} :	60*20*12mm 2.362*0.787*0.472in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	+30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-4960-4980-70

Customization is available upon request.