

# QBF-5000-6000-35

5~6GHz, 35dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	5~6GHz
Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	35dB @DC~4.6GHz min. 35dB @6.4~10GHz min.

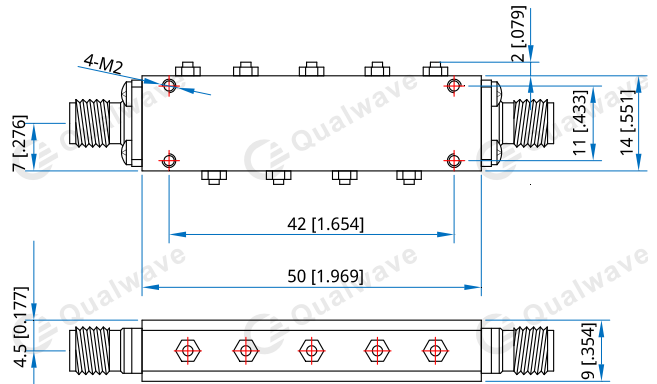
**Mechanical**

Size <sup>*1</sup> :	50*14*9mm 1.969*0.551*0.354in
Connectors:	SMA Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-5000-6000-35**

Customization is available upon request.