

QBF-5640-5660-50

5.64~5.66GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	5.64~5.66GHz
Passband Insertion Loss:	0.6dB max.
Passband Attenuation:	0.15dB max.
Stopband Attenuation:	50dB@DC~5GHz min. 50dB@6.3~18GHz min.
VSWR:	1.3 max.
Average Power:	5W max.
Impedance:	50Ω

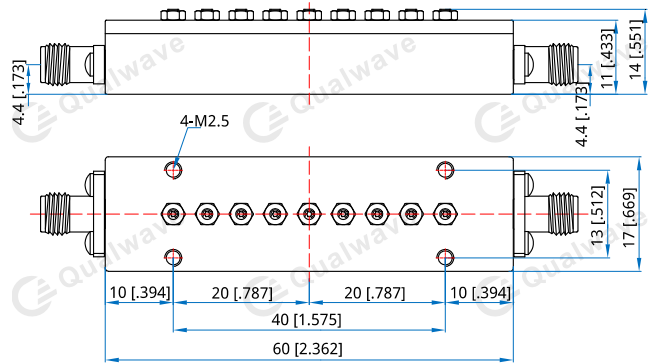
Mechanical

Size ^{*1} :	60*17*11mm 2.362*0.669*0.433in
RF Connectors:	SMA Female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-5640-5660-50

Customization is available upon request.