

QBF-5900-7150-70

5.9~7.15GHz, 70dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	5.9~7.15GHz
Passband Insertion Loss:	0.6dB max.
Passband Ripple:	0.3dB max.
Stopband Attenuation:	70dB@DC~5.08GHz min. 70dB@7.77~19GHz min.
VSWR:	1.25 max.
Impedance:	50Ω
Average Power:	5W max.

Mechanical


Size ^{*1} :	70*16*11mm 2.756*0.63*0.433in
RF Connectors:	SMA female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings

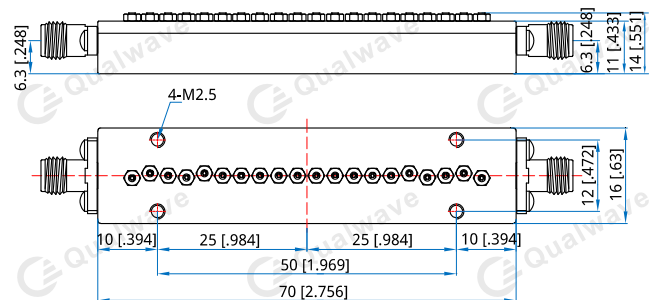

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-5900-7150-70

Customization is available upon request.