

QBF-64-76-35

64~76MHz, 35dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	64~76MHz
-1dB Passband Width:	70MHz min.
Passband Insertion Loss:	3dB max.
Stopband Attenuation:	35dB@50MHz min. 35dB@90MHz min.
VSWR:	1.35 max.

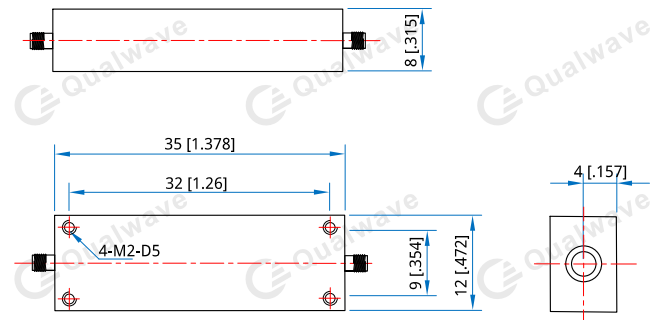
Mechanical

Size ^{*1} :	35*12*8mm 1.378*0.472*0.315in
RF Connectors:	SMA female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-64-76-35

Customization is available upon request.