

QBF-7400-12600-40

7.4~12.6GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	7.4~12.6GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.6 max.
Stopband Attenuation:	40dB@DC-6GHz max. 40dB@14-18GHz max.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

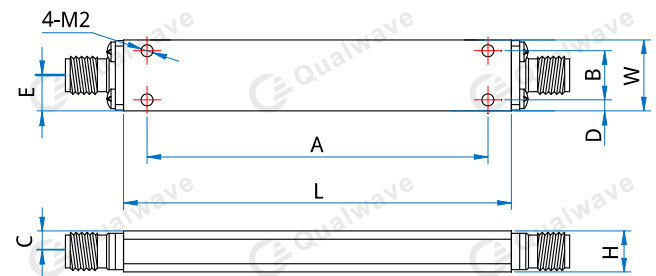

Size	L	W	H	A	B	C	D	E
mm	52	15	10	45	10	1.5	5	8.5
in	2.047	0.591	0.394	1.772	0.394	0.059	0.197	0.335

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-7400-12600-40

Customization is available upon request.