

QBF-7650-8350-50

7.65~8.35GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|--------------------------|---|
| Passband: | 7.65~8.35GHz |
| Passband Insertion Loss: | 3dB max. |
| VSWR: | 1.5 max. |
| Stopband Attenuation: | 50dBc@7.15GHz min. 50dBc@8.5GHz min. |


Mechanical

| | |
|----------------|--|
| RF Connectors: | SMA Female, removable Φ0.38mm inner pin |
| Mounting: | 4-M2 through-hole |

Environmental

| | |
|----------------------------|-----------|
| Operating Temperature: | -40~+70°C |
| Non-operating Temperature: | -55~+85°C |

Outline Drawings

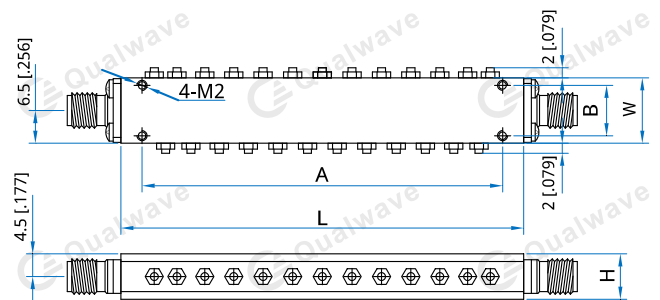

| Size: | L | W | H | A | B |
|-------|------|-------|-------|-------|-------|
| mm: | 80 | 13 | 9 | 71.6 | 10 |
| in: | 3.15 | 0.512 | 0.354 | 2.819 | 0.394 |

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-7650-8350-50

Customization is available upon request.