

QBF-7715-8695-80

7715~8695MHz, 80dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	7715~8695MHz
Passband Insertion Loss:	3dB max.
Group Delay:	8nS max.
VSWR:	1.5 max.
Stopband Attenuation:	80dBc@7500MHz min. 80dBc@8910MHz min.


Mechanical

RF Connectors:	SMA Female, removable Φ0.4mm inner pin
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-10~+50°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

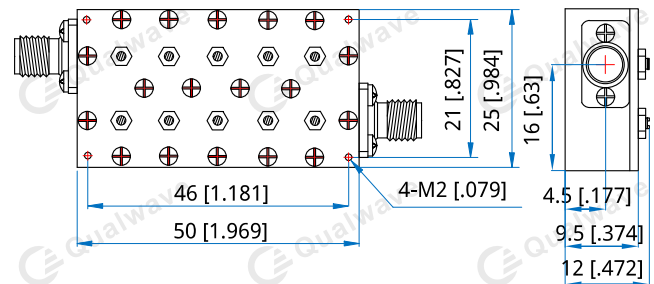

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-7715-8695-80

Customization is available upon request.