

QBF-8250-9250-50

8.25~9.25GHz, 50dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	8.25~9.25GHz
Insertion Loss:	2.5dB max.
Passband Ripple:	1.0dB max
Stopband Attenuation:	50dBc@DC~7.75GHz min. 50dBc@9.75~18GHz min.
VSWR:	1.5 max.

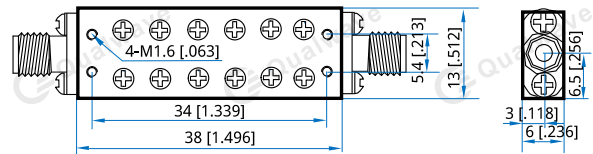
Mechanical

Size ^{*1} :	38*13*6mm 1.496*0.512*0.236in
RF Connectors:	SMA Female (removable)
Mounting:	4-M1.6 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-8250-9250-50

Customization is available upon request.