

# QBF-860-880-60

0.86~0.88GHz, 60dBc

- |   |  |
|---|--|
| <b>Features:</b><br>* High Stopband Rejection<br>* Small Size | <b>Applications:</b><br>* Telecom<br>* Laboratory Test<br>* Receivers<br>* Instrumentation |
|---|--|

**Electrical**

Frequency:	0.86~0.88GHz
Passband Width:	20~25MHz
Passband Insertion Loss:	1.5dB max.
Stopband Attenuation:	60dBc@DC~837.5MHz min. 60dBc@902.5~2000MHz min.
VSWR:	1.5 max.

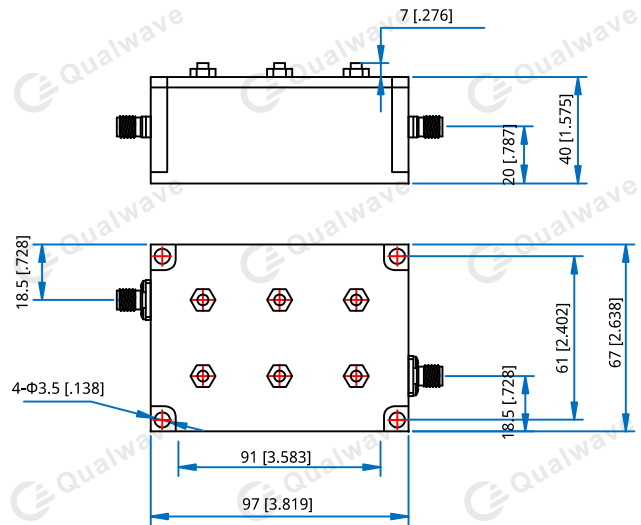
**Mechanical**

Size*1:	97*67*40mm 3.819*2.638*1.575in
RF Connectors:	SMA Female
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

**How To Order**  
**QBF-860-880-60**

Customization is available upon request.