

QBF-9000-14000-40

9~14GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	9~14GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.8 max.
Stopband Attenuation:	40dBc@DC~8GHz min. 40dBc@15~23GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

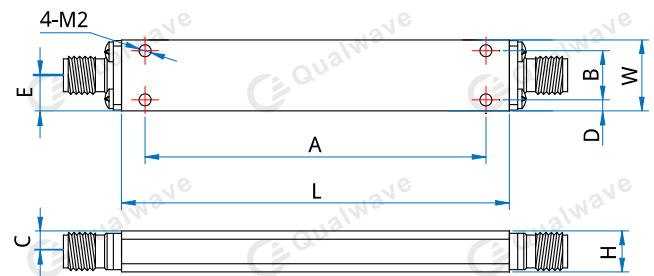

Size	L	W	H	A	B	C	D	E
mm	60	14.5	9.5	52	8.9	4.75	1.7	8
in	2.362	0.571	0.374	2.047	0.35	0.187	0.067	0.315

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-9000-14000-40

Customization is available upon request.