

QBF-9250-10750-60

9.25~10.75GHz, 60dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	9.25~10.75GHz
Passband Insertion Loss:	1.2dB max.
VSWR:	1.7 max.
Stopband Attenuation:	60dBc@8.9GHz min. 60dBc@11.1GHz min.
Average Power:	1W
Peak Power:	2W


Mechanical

RF Connectors:	SMA Female
Mounting:	4* Φ 2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

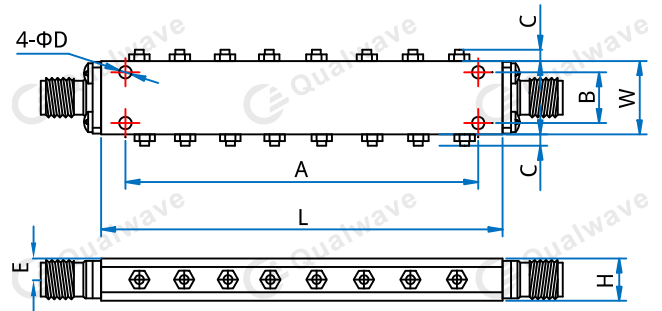

Size	L	W	H	A	B	C	D
mm	102	14	11	93.8	10.8	2	2.2
in	4.016	0.551	0.433	3.693	0.425	0.079	0.087

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

[QBF-9250-10750-60](#)

Customization is available upon request.