

# QBF-9800-12800-60

9.8~12.8GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	9.8~12.8GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.22 max.
Stopband Attenuation:	60dB@DC~7.54GHz min. 60dB@15.36~22GHz min.
Impedance:	50Ω
Average Power:	5W max.

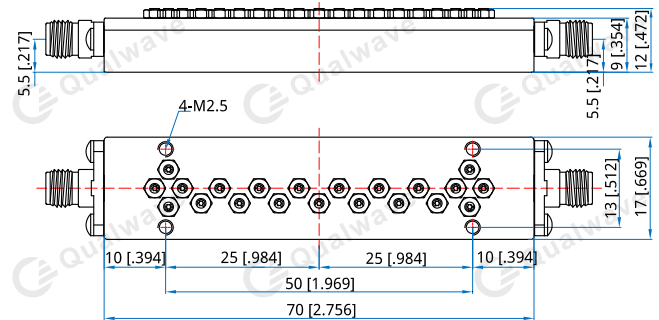
**Mechanical**

Size <sup>*1</sup> :	70*17*12mm 2.756*0.669*0.472in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-9800-12800-60**

Customization is available upon request.