

QRF-1785-1805-40

1.785~1.805GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.775GHz 1.815~5.2GHz
Passband Insertion Loss:	2dB max.@DC~1770MHz & 1820~5200MHz 3dB max.@1770~1785MHz 5dB max.@1815~1820MHz
Passband VSWR:	1.5 max.@DC~1775MHz & 1820~5200MHz 2 max.@1815~1820MHz
Stopband:	1.785~1.805GHz
Stopband Attenuation:	40dB min.
Average Power:	20W max.
Impedance:	50Ω

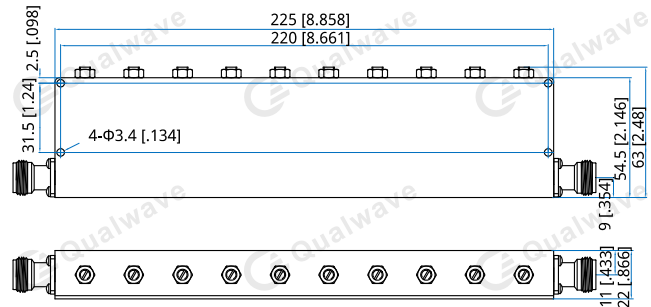
Mechanical

Size*1:	225*63*22mm 8.858*2.48*0.866in
RF Connectors:	N Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	10~40°C
--------------	---------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

How To Order

QRF-1785-1805-40

Customization is available upon request.