

QRF-1805-1880-60

1.805~1.88GHz, 60dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Passband:	DC~1.78GHz 1.905~5.2GHz
Passband Insertion Loss:	2dB typ.
Passband VSWR:	1.5 typ.
Stopband:	1.805~1.88GHz
Stopband Attenuation:	60dB min.
Average Power:	30W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	248*45*21mm 9.764*1.772*0.827in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.


Typical Performance Curves

Environmental


Input VSWR vs. Frequency

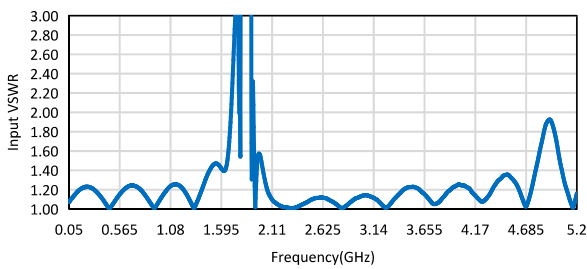

Output VSWR vs. Frequency

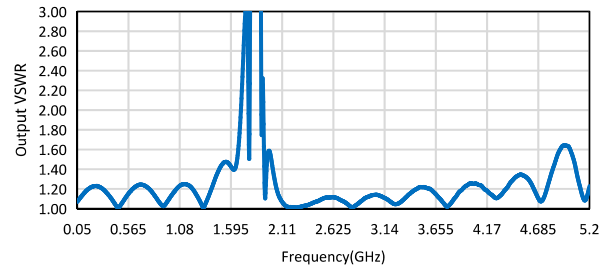


Stopband Attenuation vs. Frequency

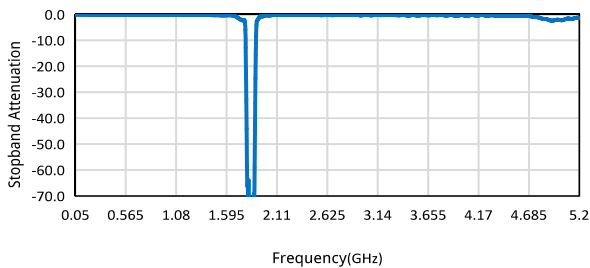

Temperature: -40~+70°C

Outline Drawings

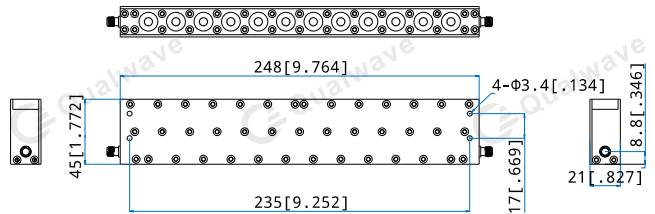

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QRF-1805-1880-60

Customization is available upon request.