

# QRF-2300-2675-50

2.3~2.675GHz, 50dB

- |   |  |
|---|--|
| <b>Features:</b><br>* High Stopband Rejection<br>* Small Size | <b>Applications:</b><br>* Telecom<br>* Laboratory Test<br>* Receivers<br>* Instrumentation |
|---|--|

## Electrical

Passband:	DC~2.2GHz 2.775~6.2GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max. @0.75~2.2GHz 1.5 max. @2.775~5.6GHz 1.8 max. @DC~0.75GHz 1.8 max. @5.6~6.2GHz
Stopband:	2.3~2.675GHz
Stopband Attenuation:	50dB min.
Average Power:	10W max.
Impedance:	50Ω

## Mechanical


Size <sup>*1</sup> :	209*42*22mm 8.228*1.654*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

## Environmental

Temperature:	-30~+70°C
--------------	-----------

## Outline Drawings

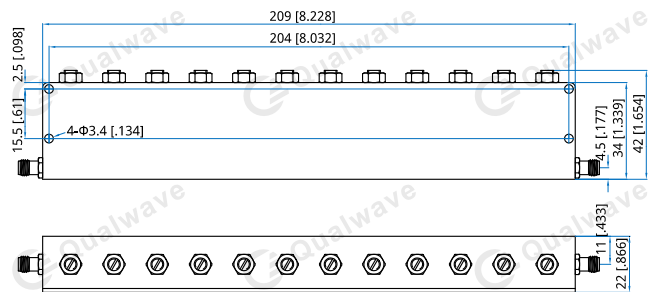

Unit: mm [in]  
Tolerance: ±0.8mm [±0.031in]

## How To Order

**QRF-2300-2675-50**

Customization is available upon request.