

# QRF-2400-2500-50

2.4~2.5GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~2.35GHz 2.55~5.5GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max.
Stopband:	2.4~2.5GHz
Stopband Attenuation:	50dB min.
Average Power:	30W max.
Impedance:	50Ω

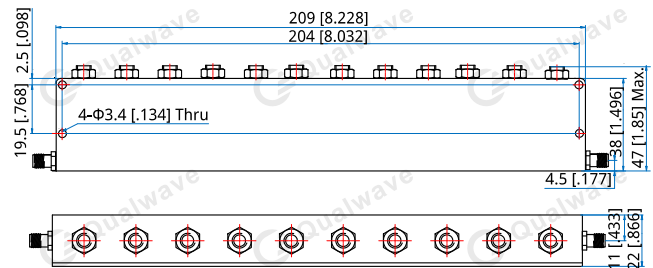
**Mechanical**

Size <sup>*1</sup> :	22*38*209mm 0.866*1.496*8.228in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

**How To Order**

**QRF-2400-2500-50**

Customization is available upon request.