

## QRF-2575-2625-60

2575~2625MHz, 60dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	DC~2550MHz 2650~7700MHz
Passband Insertion Loss:	1dB max. @DC~2520MHz, 2680~7700MHz 2dB max. @2520~2550MHz, 2650~2680MHz
VSWR:	1.5 max.
Stopband:	2575~2625MHz
Stopband Attenuation:	60dB min.
Average Power:	30W max.

### Mechanical


Size <sup>*1</sup> :	173*42*18mm 6.811*1.654*0.709in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature: -20~+60°C

### Outline Drawings

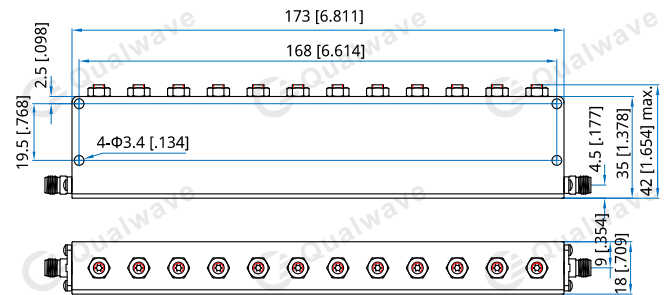

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

### How To Order

**QRF-2575-2625-60**

Customization is available upon request.