

# QRF-2620-2690-60

## 2.62~2.69GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~2.57GHz 2.74~10GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	2 max.
Stopband:	2.62~2.69GHz
Stopband Attenuation:	60dB min.
Average Power:	50W max.
Impedance:	50Ω

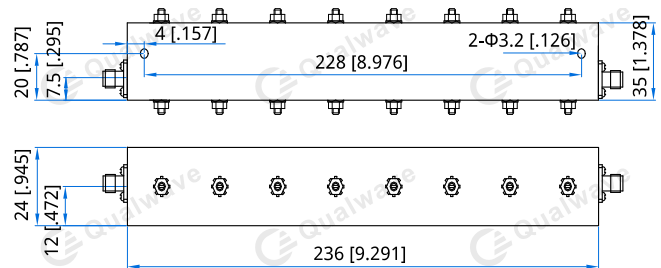
**Mechanical**

Size <sup>*1</sup> :	236*35*24mm 9.291*1.378*0.945in
RF Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	0~+55°C
--------------	---------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

**How To Order**

**QRF-2620-2690-60**

Customization is available upon request.