

# QRF-3420-3700-60

3.42~3.7GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~3.27GHz
	3.85~8.5GHz
Passband Insertion Loss:	1.2dB max.
Passband VSWR:	1.7 max.
Stopband:	3.42~3.7GHz
Stopband Attenuation:	60dB min.
Average Power:	10W max.
Impedance:	50Ω

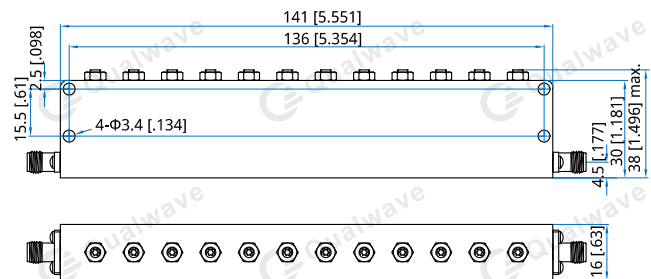
**Mechanical**

Size <sup>*1</sup> :	141*30*16mm
	5.551*1.181*0.63in
RF Connectors:	SMA Female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QRF-3420-3700-60**

Customization is available upon request.