

# QRF-4800-4900-55

4.8~4.9GHz, 55dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~4.72GHz 4.98~11GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.7 max.
Stopband:	4.8~4.9GHz
Stopband Attenuation:	55dB min.
Average Power:	10W max.
Impedance:	50Ω

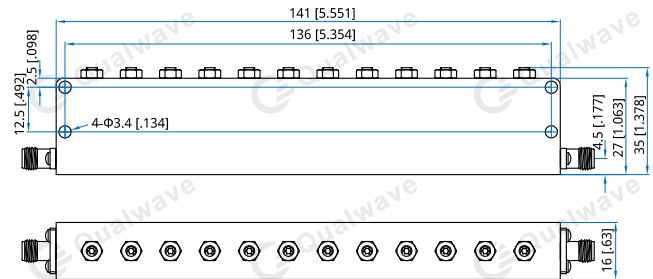
**Mechanical**

Size <sup>*1</sup> :	141*35*16mm 5.551*1.378*0.63in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

**How To Order**

**QRF-4800-4900-55**

Customization is available upon request.