

# QRF-600-700-45

0.6~0.7GHz, 45dBc

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	DC~0.5GHz 0.8~2.5GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.8 max.
Stopband:	0.6~0.7GHz
Stopband Attenuation:	45dBc min.
Average Power:	10W max.
Impedance:	50Ω

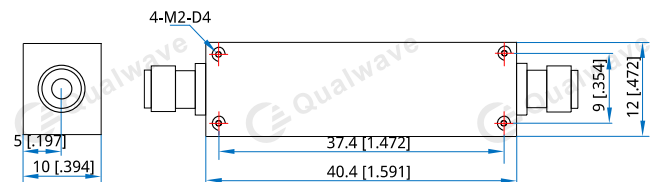
**Mechanical**

Size <sup>*1</sup> :	40.4*12*10mm 1.591*0.472*0.394in
RF Connectors:	SMA Female
Mounting:	4-M2, depth 4mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]

**How To Order**

**QRF-600-700-45**

Customization is available upon request.