

QRF-880-915-30

0.88~0.915GHz, 30dB

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Passband:	DC~0.870GHz 0.925~2.5GHz
Passband Insertion Loss:	1.5dB max. @DC~860MHz&935~2500MHz 2dB max. @860~870MHz&925~935MHz
Passband VSWR:	1.5 max.
Stopband:	0.88~0.915GHz
Stopband Attenuation:	30dB min.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size*1:	265*90*28mm 10.433*3.543*1.102in
RF Connectors:	SMA female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

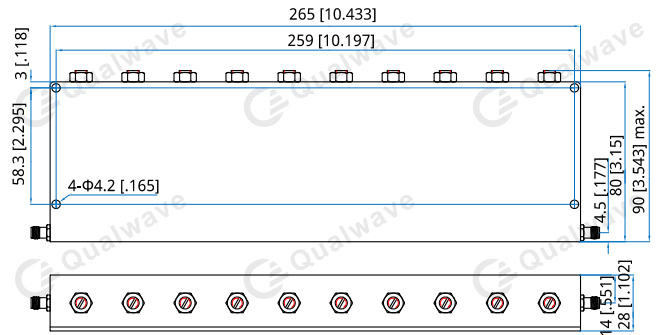

Unit: mm [in]
Tolerance: ±0.8mm [±0.031in]

How To Order

QRF-880-915-30

Customization is available upon request.