

## QRF-930-960-55

930~960MHz, 55dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	DC~910MHz
	975~3000MHz
Passband Insertion Loss:	3dB max.
Passband VSWR:	2 max.
Stopband:	930~960MHz
Stopband Attenuation:	55dB min.
Average Power:	50W max.
Impedance:	50Ω

### Mechanical


Size*1:	245*65.8*36mm
	9.646*2.591*1.417in
RF Connectors:	SMA Female
Mounting:	4-Φ4mm through-hole

[1] Exclude connectors.

### Environmental

Temperature: 0~+55°C

### Outline Drawings

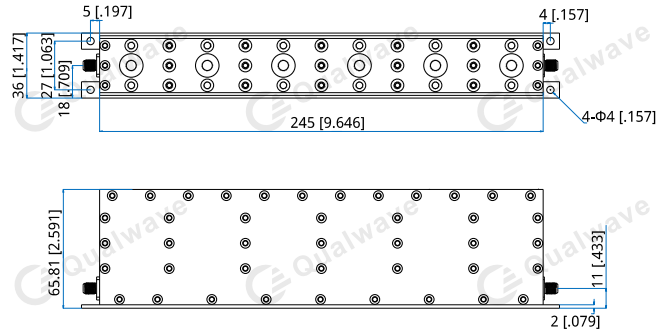

Unit: mm [in]

Tolerance: ±0.8mm [±0.031in]


### How To Order

[QRF-930-960-55](#)


Customization is available upon request.

### Typical Performance Curves

Input VSWR vs. Frequency

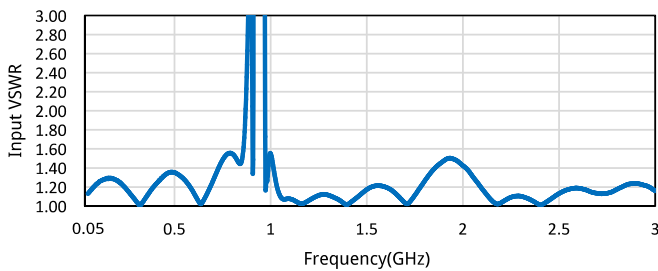

Output VSWR vs. Frequency

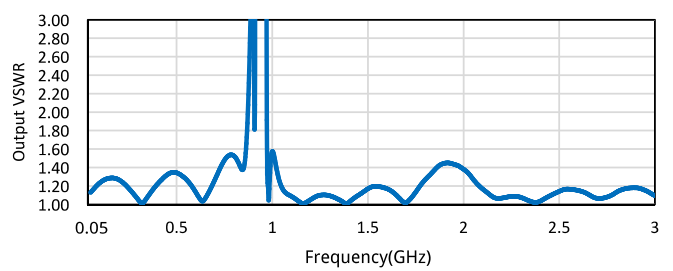

Stopband Attenuation vs. Frequency

