

QBT-10-40000

0.01~40GHz

Features:
* Broadband
* Small Size

Applications:
* Telecom
* Satcom
* Laboratory Test
* Instrumentation

Electrical

Frequency Range:	0.01~40GHz
Insertion Loss:	2.2dB max.
Isolation:	30dB typ.
VSWR:	2 max.
Voltage:	25V max.
Current:	0.5A max.
Handling Power:	10W max.

Mechanical


Size ^{*1} :	16*12*10mm 0.63*0.472*0.394in
DC Connectors:	Solder Pin
RF&DC Connectors:	2.92mm Female

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+105°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

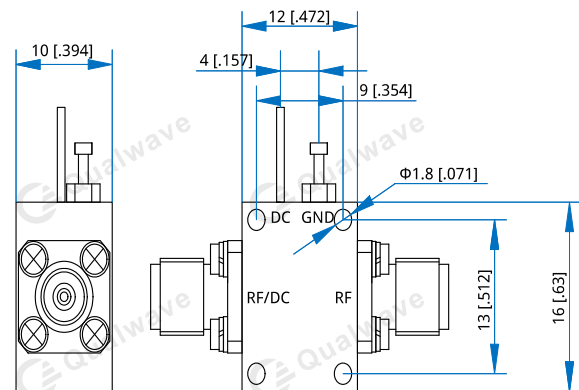

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QBT-10-40000

Customization is available upon request.