

QBTP-200-12000-S

High Power, 0.2~12GHz

Features:
 * Broadband
 * Small Size

Applications:
 * Telecom
 * Satcom
 * Laboratory Test
 * Instrumentation

Electrical

Frequency:	0.2~12GHz
Insertion Loss:	0.6dB max.
VSWR:	1.8 max.
Voltage:	0~36V DC
Current:	0.14A @36V
RF Input Power:	10W max.

Mechanical


Size ^{*1} :	30*20*12mm 1.181*0.787*0.472in
RF Connectors:	SMA
Power Supply & Control Interface:	Solder Pin & Terminal Post
Mounting:	2- Φ 2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

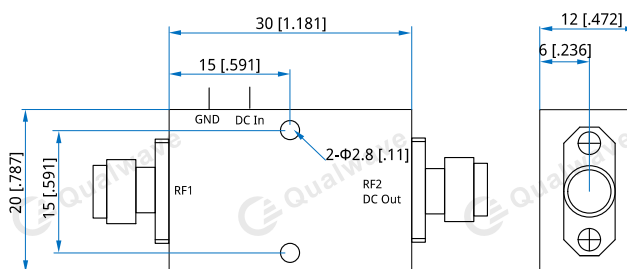

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QBTP-200-12000-S

Customization is available upon request.