

## QBTP-5-700-S

High Power, 0.005~0.7GHz

Features:  
 \* Broadband  
 \* Small Size

Applications:  
 \* Telecom  
 \* Satcom  
 \* Laboratory Test  
 \* Instrumentation

### Electrical

Frequency:	0.005~0.7GHz
Insertion Loss:	0.5dB max.
VSWR:	1.8 max.
Voltage:	0~48V DC
Current:	3.13A@48V
RF Input Power:	150W max.

### Mechanical


Size <sup>*1</sup> :	40*20*13mm 1.575*0.787*0.512in
RF Connectors:	SMA
Power Supply & Control Interface:	Solder Pin & Terminal Post
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

### Outline Drawings

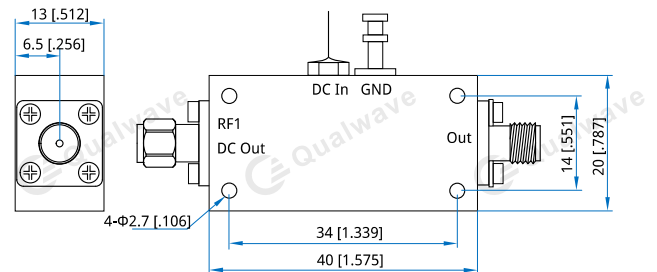

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

### How To Order

**QBTP-5-700-S**

Customization is available upon request.