

# QC2-FRG-T50P-1

## 2.4mm Female Right Angle

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC-50GHz
VSWR:	1.4 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC
Impedance:	50Ω

### Mechanical


RF Connector:	2.4mm Female Right Angle
Mating Cable:	QT50P
Outer Conductor:	Positived stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated brass&beryllium copper

### How To Order

**QC2-FRG-T50P-1**

Customization is available upon request.

### Outline Drawings

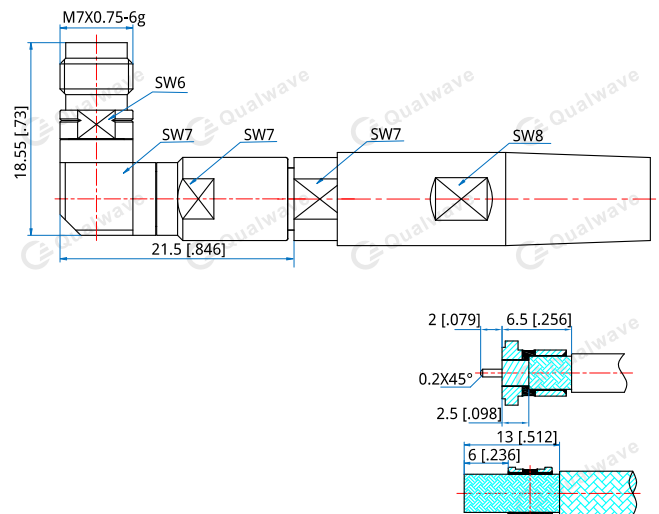

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]