

# QC2-MG-047-1

## 2.4mm Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC-50GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min
Impedance::	50Ω

### Mechanical


RF Connector:	2.4mm Male
Mating Cable:	QA150 ,QH160 ,QD047 ,QE047
Outer Conductor:	303F stainless steel

### How To Order

**QC2-MG-047-1**

Customization is available upon request.

### Outline Drawings

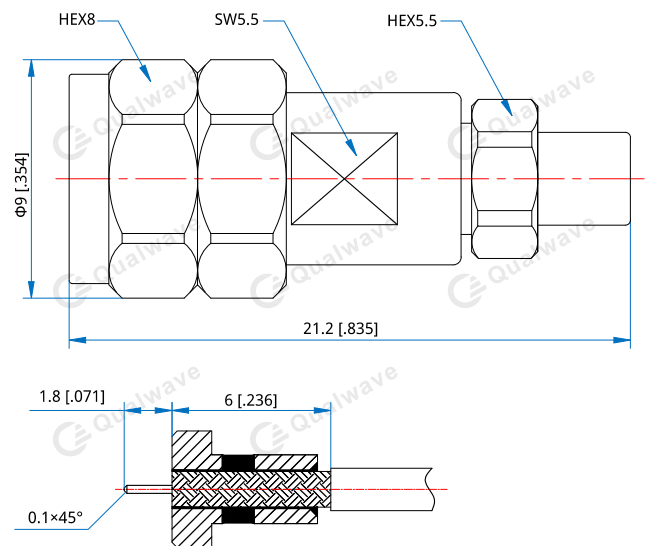

Unit: mm [in]  
Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]